


110130 FOR BS PIPE

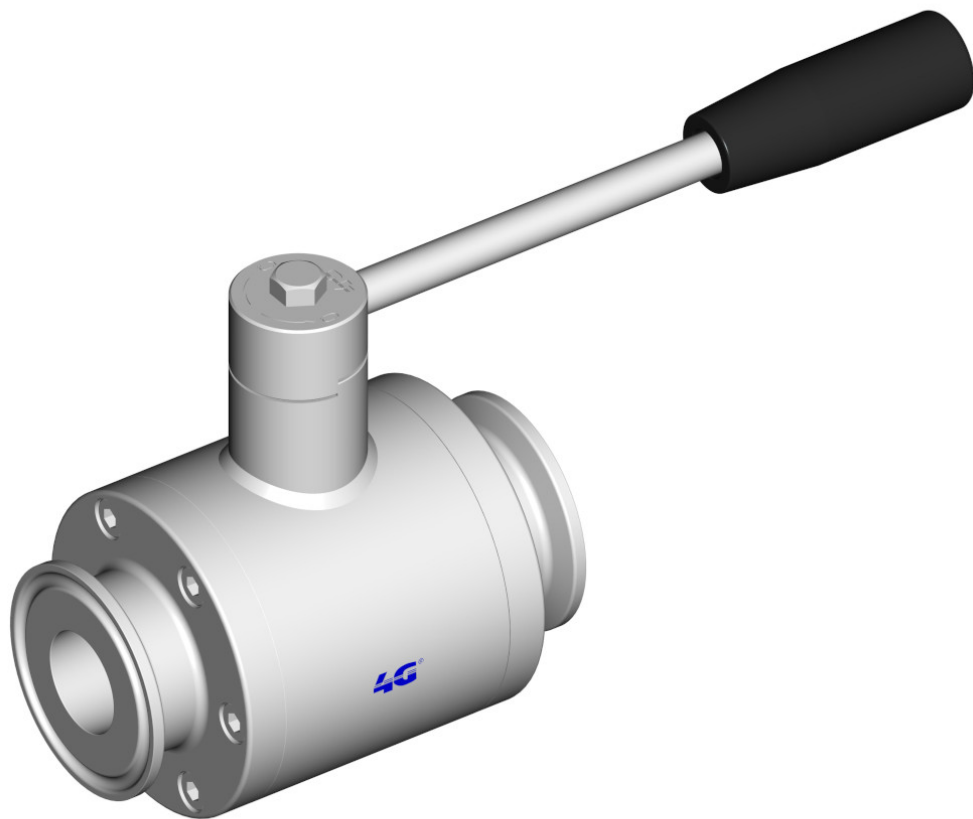

TWO-way ball valve

Drive: Inox lever

Connection: **CLAMP normative DIN 32676 TAB.4 REIHE C**
For TUBE according to normative BS/OD (ASTM A270)

Flow: Full and reduced

Material: Aisi 316L (1.4404)

Measure: from 1/2" to 4"

Seals: Modified Virgin P.T.F.E.

Operating temperature: -20°C+170°C

Outer finish: Polished

Antistatic device ATEX:

II 2G Ex h IIC T4 Gb

II 2D Ex h IIIC T135°C Db

On request:

M.O.C.A. CE 1935/2004


• Seals made of:

PTFE with glass -20°C+170°C


PTFE with carbographtite -20°C+180°C

PTFE with inox -20°C+200°C

UHMW High-molecular weight polyethylene -20°C+80°C

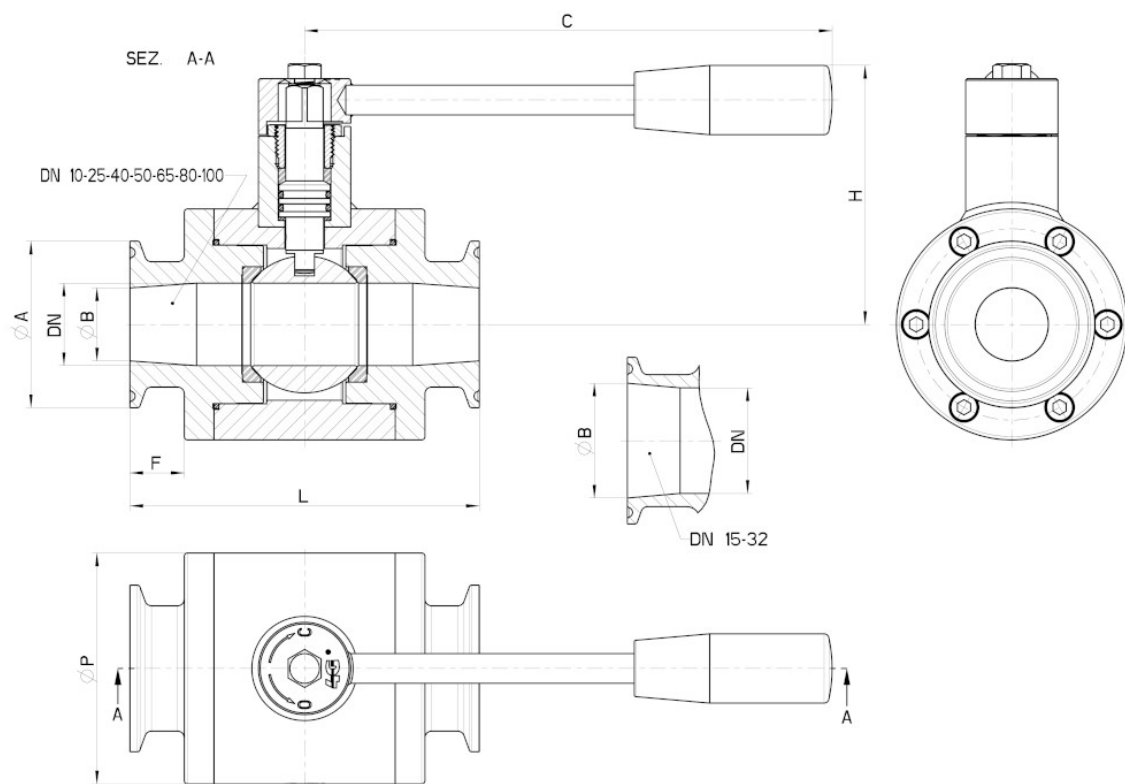

CLAMP REIHE C	DN	L	Ø A	Ø B	F	H	C	Ø P	PN	Kg	CODE AISI 316L
1/2"	10	88	25	9.4	16	62	110	48	100	0,90	110130A61210
3/4"	15	92	25	15.75	16.5	65	110	52	100	1,01	110130A61810
1"	25	106	50.5	22.1	16.5	79	160	70	64	2,26	110130A62610
1*1/2	32	112	50.5	34.8	22	111	190	85	64	3,17	110130A63210
1*1/2	40	126	50.5	34.8	22	115	190	100	64	4.66	110130A63410
2"	50	134	64	47.5	22	123	190	115	40	6.15	110130A63810
2*1/2	65	162	77.5	60.2	25	140	225	140	40	10.95	110130A64410
3"	80	182	91	72.9	30	152	225	155	40	13.17	110130A64810
4"	100	194	119	97.38	33	166	325	185	25	19.38	110130A65410

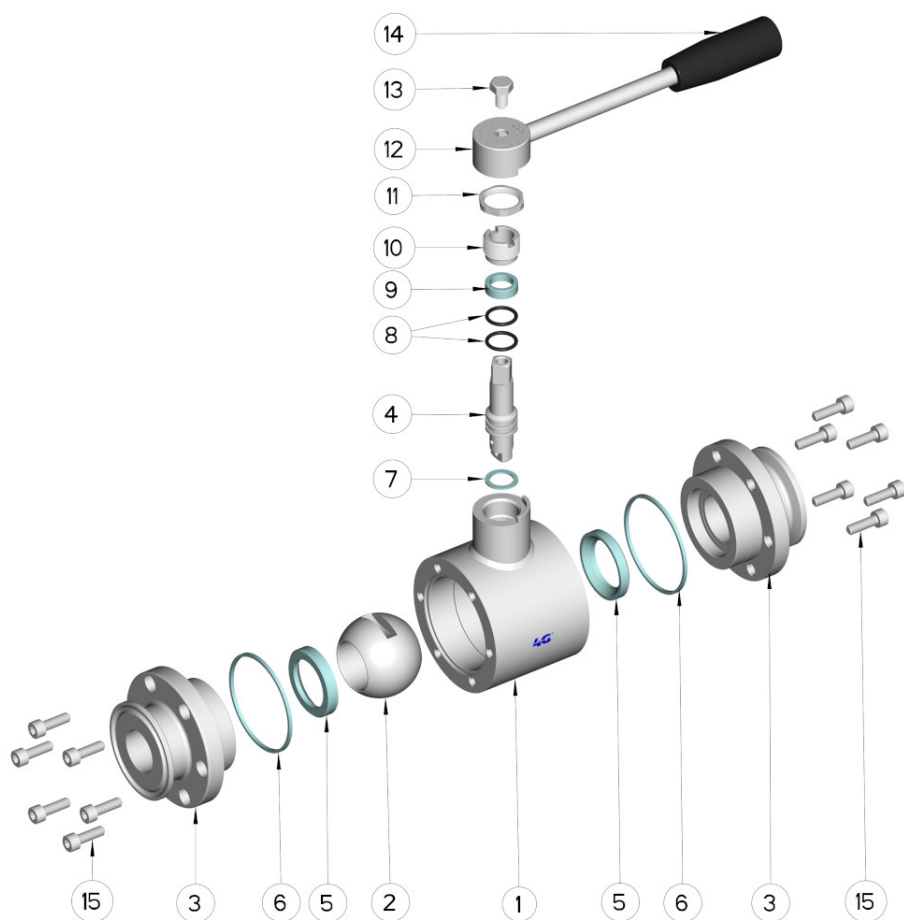

POSITION	DENOMINATION	PIECES	MATERIAL
1	Body	1	AISI 316L
2	Ball	1	AISI 316L
3	Sleeves	2	AISI 316L
4	Stem	1	AISI 316L
5	Ball Seals	2	PTFE Vergine Modificato
6	Sleeve Seals	2	PTFE
7	Stem Seal	1	PTFE
8	Stem or-Seal	2	FKM
9	Stem Seal	1	PTFE
10	Register ring	1	AISI 304L (303)
11	Locknut	1	AISI 304L
12	Lever	1	AISI 304L
13	SCREW	1	AISI 304L
14	Handle	1	DUROPLASTO (PF)
15	Sleeve screw	da 12 a 16	AISI 304L

