


## 113031 STANDARD SEALS - GAROLLA




TWO-way ball valve  
Drive: ISO 5211 - DIN 3337 flange for actuator  
Connection: GAROLLA  
Flow: Full  
Material: Aisi 304L (1.4307) - Aisi 316L (1.4404)  
Measure: 5"  
Seals: Virgin P.T.F.E.  
Operating temperature: -20°C+160°C  
Outer finish: Turned  
Screws for mounting actuator included  
Antistatic device ATEX:  
II 2G Ex h IIC T4 Gb  
II 2D Ex h IIIC T135°C Db

On request:  
M.O.C.A. CE 1935/2004

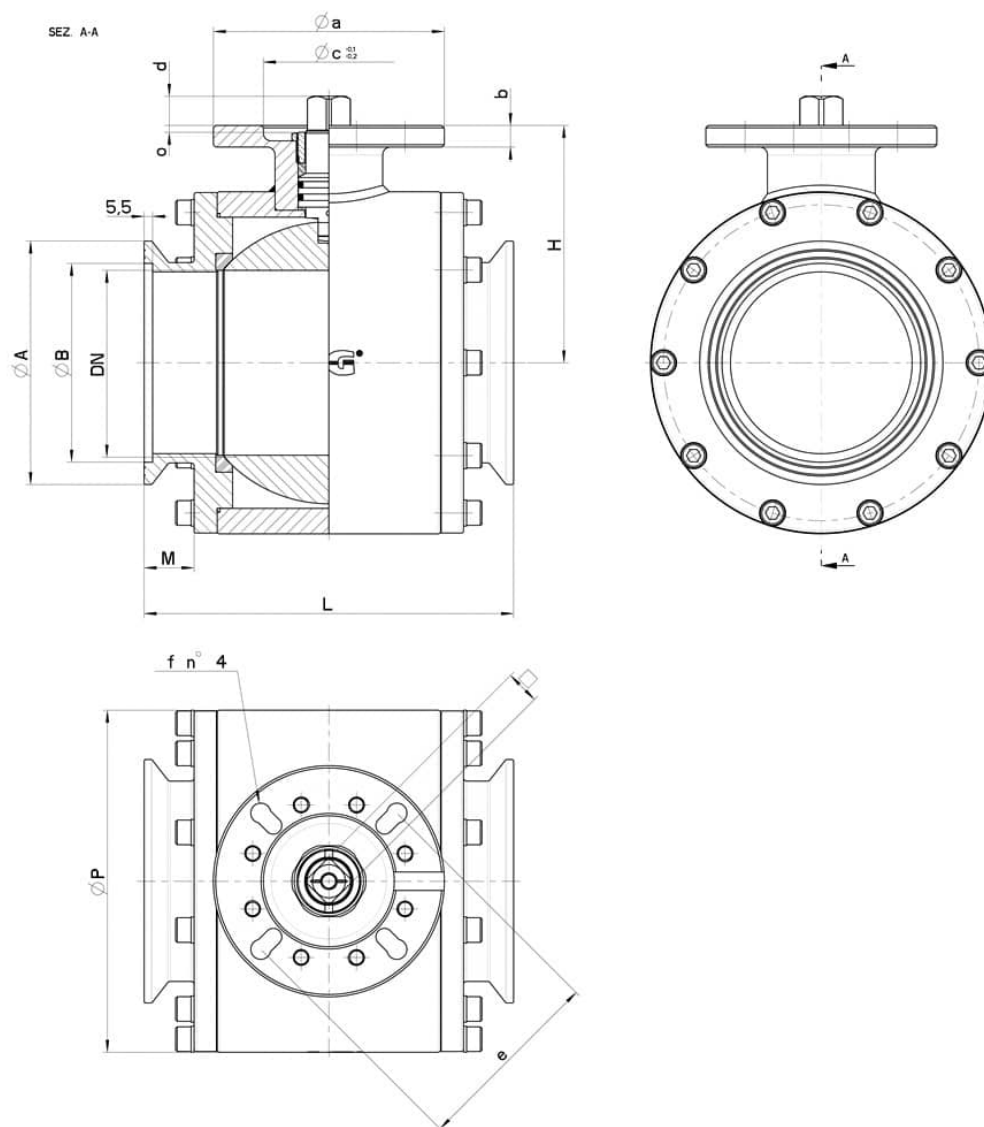

| GAR | DN  | L   | Ø A | Ø B | H   | Ø P | PN | Kg | ISO-DIN   | Ø a | b  | Ø c x Ø      | □     | d  | e       | f  | Bolts         | Nm * | CODE AISI 304L | CODE AISI 316L |
|-----|-----|-----|-----|-----|-----|-----|----|----|-----------|-----|----|--------------|-------|----|---------|----|---------------|------|----------------|----------------|
| 120 | 120 | 240 | 158 | 129 | 154 | 222 | 16 | 36 | F.10-F.12 | 150 | 14 | 85<br>x<br>3 | 22-27 | 19 | 102-125 | 11 | M10x25-M12x30 | 130  | 113031A45810   | 113031A65810   |

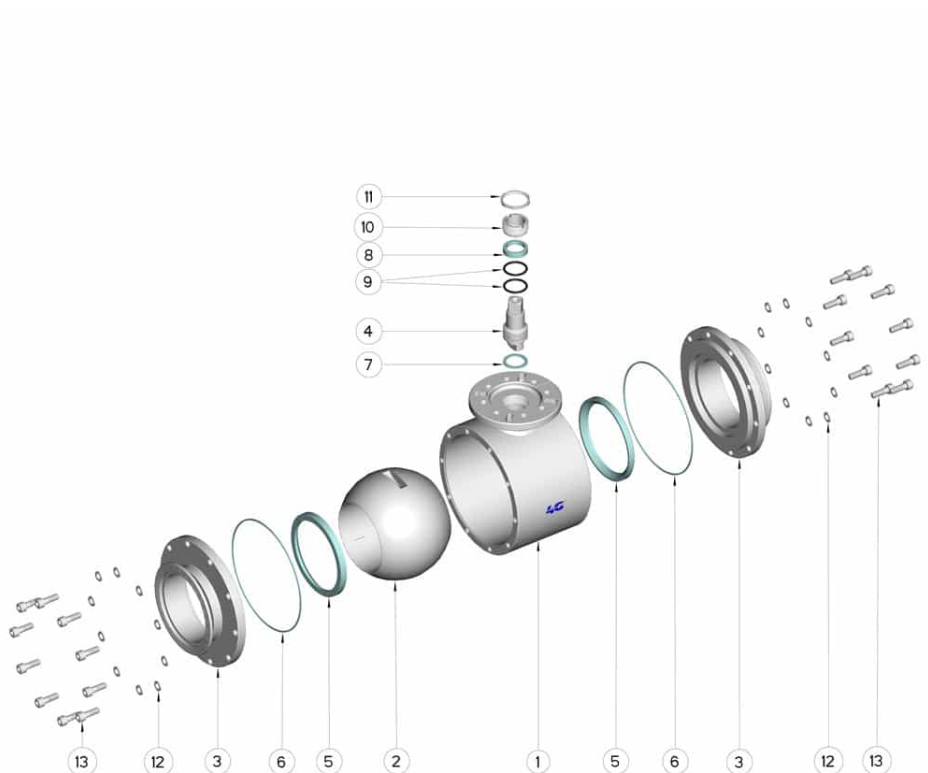

| POS. | DENOMINATION  | PCS | MAT.             |
|------|---------------|-----|------------------|
| 1    | Body          | 1   | AISI 304L - 316L |
| 2    | Ball          | 1   | AISI 304L - 316L |
| 3    | Sleeves       | 2   | AISI 304L - 316L |
| 4    | Stem          | 1   | AISI 304L - 316L |
| 5    | Ball Seals    | 2   | PTFE             |
| 6    | Sleeve Seals  | 2   | PTFE             |
| 7    | Stem Seal     | 1   | PTFE             |
| 8    | Stem Seal     | 1   | PTFE             |
| 9    | Stem or-Seal  | 2   | FKM              |
| 10   | Register ring | 1   | AISI 304L (303)  |
| 11   | Nut           | 1   | AISI 304L        |
| 12   | Sleeve washer | 20  | AISI 304L        |
| 13   | Sleeve screw  | 20  | AISI 304L        |

