


130155C INTEGRAL SEALS – REVOLVING THREADED FLANGES EN 1759-1 CLASS 150 – HEATING JACKET

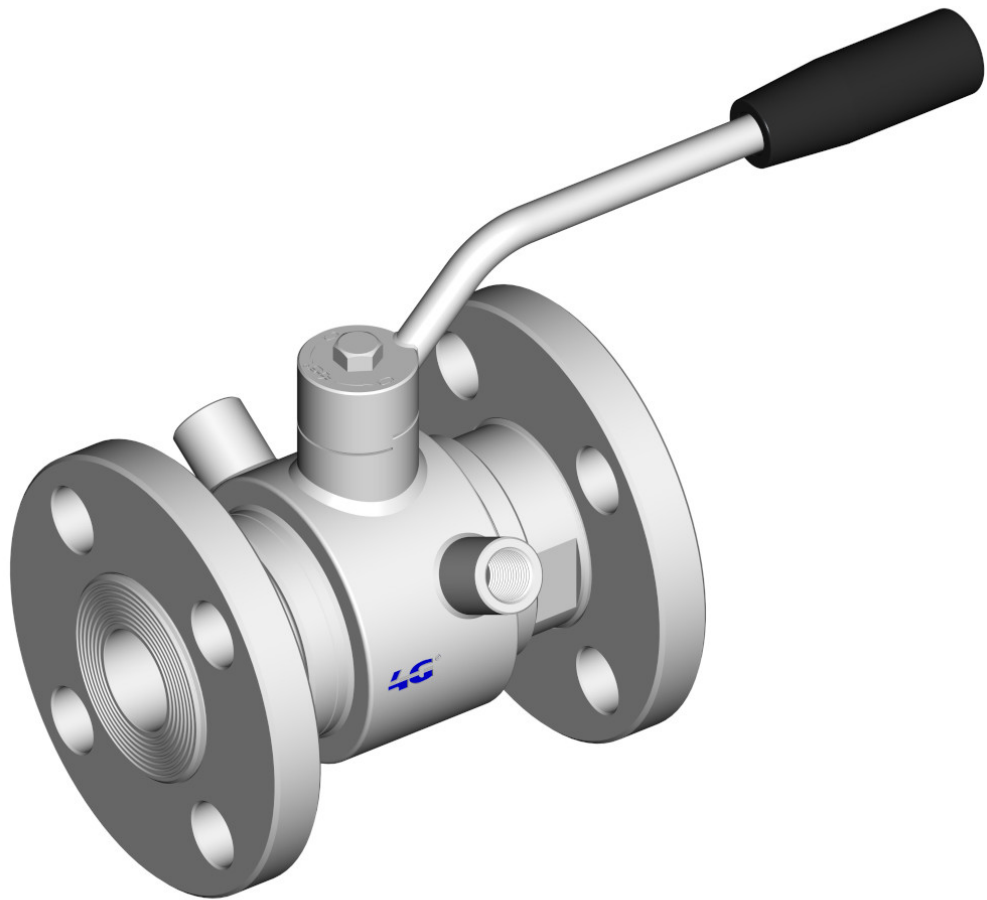

TWO-way ball valve “Integral Seal” with HEATING JACKET

Drive: Inox lever

Connection: Revolving threaded flanges EN 1759-1 CLASS 150 (exANSI 150)

Flow: Full

Material: Aisi 316L (1.4404)

Measure: from 1" to 4"

Seals: Virgin P.T.F.E.

Operating temperature: -20°C+160°C

Outer finish: Polished

On request:

Antistatic device ATEX:


II 2G Ex h IIC T4 Gb

II 2D Ex h IIIC T135°C Db


M.O.C.A. CE 1935/2004

• Seals made of:

PTFE with glass -20°C+170°C

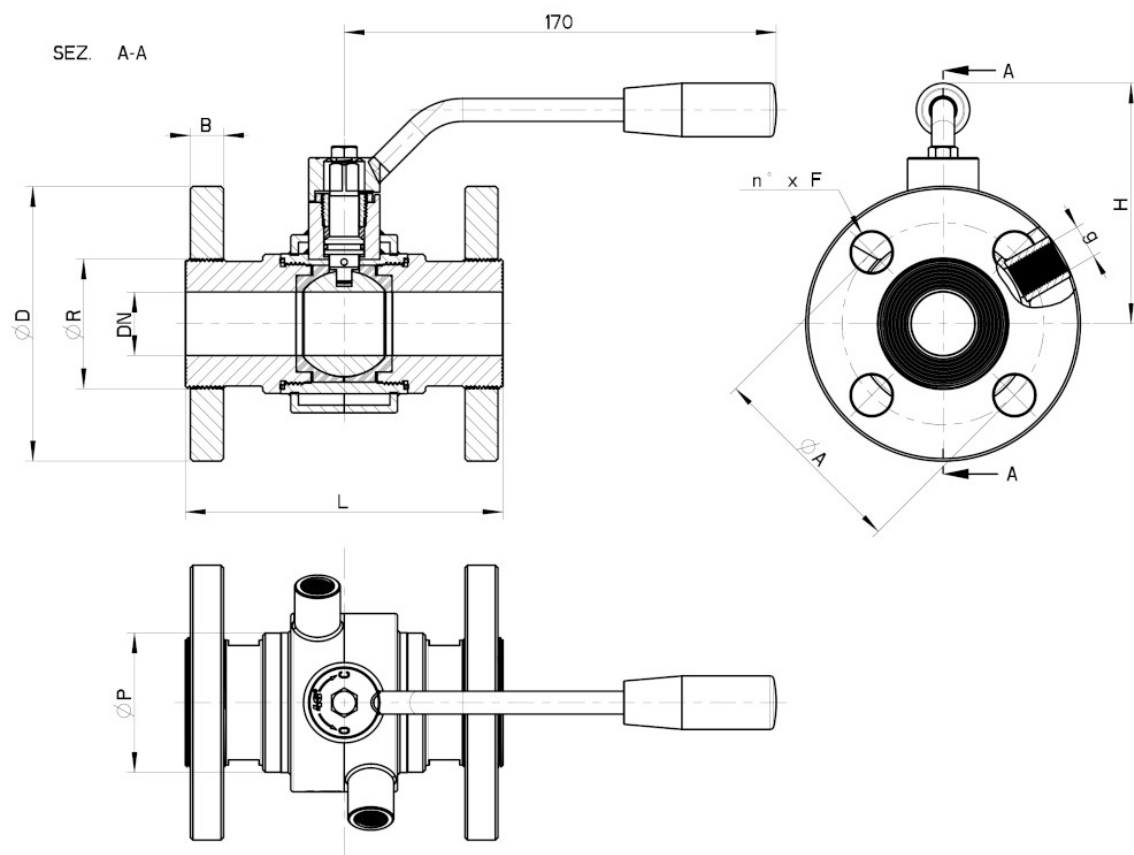

CLASS 150	DN	L	C	H	Ø P	Ø D	B	Ø R	A	n° x F	g	Kg	CODE AISI 316L
1"	25	125	170	95	55	108	13	51	79,4	4x16	1/4"	3,30	130155C62610
1" 1/4	32	130	170	100	65	117,5	14,5	63	88,9	4x16	1/4"	4,32	130155C63010
1" 1/2	40	140	245	131	80	127	16	75	98,4	4x16	3/8"	6,45	130155C63410
2"	50	150	245	138	95	152,4	17,5	89	120,6	4x19	3/8"	9,03	130155C63810
2" 1/2	65	170	270	159	113	177,8	21	110	139,7	4x19	1/2"	14,30	130155C64410
3"	80	180	300	170	140	190,5	22,2	120	152,4	4x19	1/2"	19,18	130155C64810
4"	100	190	330	190	167	228,6	22,2	140	190,5	8x19	1/2"	26,86	130155C65410

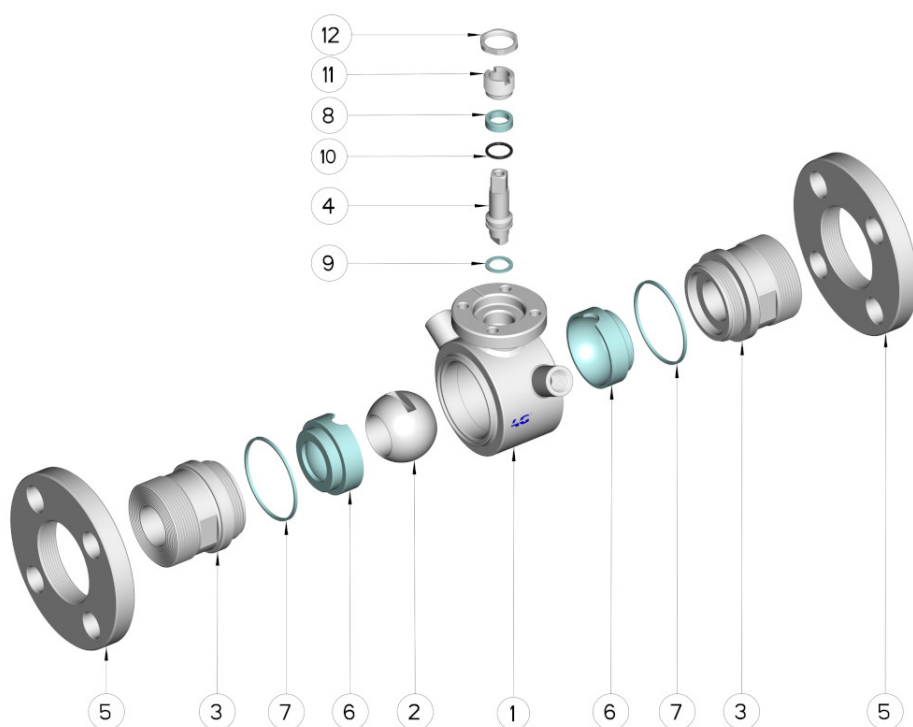

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 316L
2	Ball	1	AISI 316L
3	Sleeves	2	AISI 316L
4	Stem	1	AISI 316L
5	Flanges	2	AISI 316L
6	Ball Seals	2	PTFE
7	Sleeve Seals	2	PTFE
8	Stem Seal	1	PTFE
9	Stem Seal	1	PTFE
10	Stem or-Seal	1	FKM
11	Register ring	1	AISI 304L (303)
12	Nut	1	AISI 304L
13	Washer	1	AISI 304L
14	Lever	1	AISI 304L
15	Handle	1	DUROPLAST (PF)

